



## Airfoil prediction at high Reynolds numbers using CFD.

**Sørensen, Niels N.; Zahle, Frederik**

*Publication date:*  
2014

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Sørensen, N. N., & Zahle, F. (2014). *Airfoil prediction at high Reynolds numbers using CFD..* Abstract from 10th European Fluid Mechanics Conference (EUROMECH), KGs. Lyngby, Denmark.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.


## Airfoil prediction at high Reynolds numbers using CFD

**Niels N. Sørensen<sup>a</sup>, Frederik Zahle<sup>a</sup>**

In connection with the newest generation of wind turbines with sizes above 10 MW and the future turbines that are already now being designed, several new challenges must be faced. From an aerodynamic perspective the two most obvious issues are the increase of the Reynolds numbers (Re) with increasing size and the possibility of increased Mach numbers in the tip region. While the Mach numbers can be controlled and kept sufficiently low by specific design choices, the increase of the Re with size is difficult to avoid. For the combination of high Re and low Mach numbers, the available measurements are very sparse and one will need to address and extrapolate the aerodynamic effects of high Re by modelling, as the experimental approach become prohibitive expensive in this range. In connection with the ongoing EU projects INNWIND and AVATAR, these activities are already addressed on a European level with a moderate effort on the experimental side and the main focus on the computational perspective.

In the present paper we investigate the capability of state of the art CFD models to handle airfoil aerodynamics at high Re, with specific focus on correct predictions of the transition process for incompressible flow. The investigations are based on the multi-block incompressible flow solver EllipSys2D, developed at DTU Wind Energy<sup>1,2</sup>, based on the pressure correction method using Rhie-Chow<sup>3</sup> approach on a non-staggered grid. The turbulence is modelled using the k- $\omega$  SST model by Menter<sup>4</sup> while the transition process is model with either the correlation based model of Menter et al.<sup>5</sup> or the  $E^n$  model as suggested by Drela and Giles<sup>6</sup> and originally implemented in EllipSys by Michelsen<sup>7</sup>.

In the present work it will be demonstrated how the correlation based transition model, that has previously been shown to work well for a series of wind turbine aerodynamic cases at moderate Re<sup>8</sup> over-predicts the viscous drag due to premature transition at high Re caused by the limitations of the empirical correlation functions inherent to the model. In contrast it is demonstrated how the more fundamental  $E^n$  model is capable of predicting transition in better agreement with available measurements for the full range of Re, and additionally is capable of predicting the correct drag trend with increasing Re.

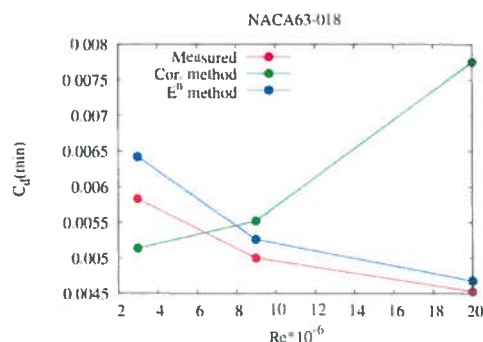

**Figure 1. Variation of the minimum drag with increasing Reynolds number for the NACA 63-018 airfoil.**

**Acknowledgements:** The original implementation of the  $E^n$  model in the EllipSys2D/3D framework were accomplished by Jess A. Michelsen shortly before his untimely death in 2005, his contribution to our computational tools is highly appreciated. The advice of F.R. Menter and R.B. Langtry concerning the correlation based transition model is highly appreciated.

<sup>a</sup> DTU Wind Energy, Aeroelastic Design Section, Frederiksborgvej 399, DK-4000 Roskilde, DK

<sup>1</sup> Michelsen. Technical Report, AFM 92-05, Technical University of Denmark, 1992.

<sup>2</sup> Sørensen. PhD thesis, Risø-R-827-(EN), Risø National Laboratory, Denmark, 1995.

<sup>3</sup> Rhie. PhD thesis, Univ. of Illinois, Urbana-Champaign, 1981.

<sup>4</sup> Menter. AIAA Paper 932906, AIAA, 1993.

<sup>5</sup> Langtry and Menter. AIAA Journal, Vol 47, No 12, Dec. 2009.

<sup>6</sup> Drela and Giles. AIAA Journal, Vol 25, No 10, 1987.

<sup>7</sup> Michelsen. Risø-R-1349(DA).

<sup>8</sup> Sørensen et al., Wind Energy, 14, 1, 2011, p 77-90.

<sup>9</sup> Loftin and Bursnall, NACA-964, 1950.